

# AUTOMATIC LEVEL CONTROL




## R23



This equipment works with **3 level electrodes SHN**. The solenoid valve will open when the water level is place below the minimum level and it will close when the water level reaches the maximum level.

Dimensions: 200x160x80mm.

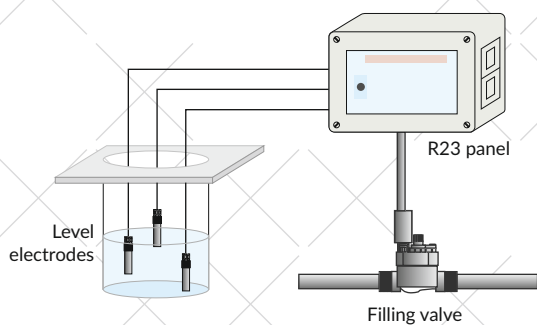


## R23K



This equipment works with **1 level sensor SHN2**. The solenoid valve will open when the water level is place below the sensor and it will close when the water level reaches the sensor. **"Anti-waves"** protection.

Dimensions: 200x160x80mm.

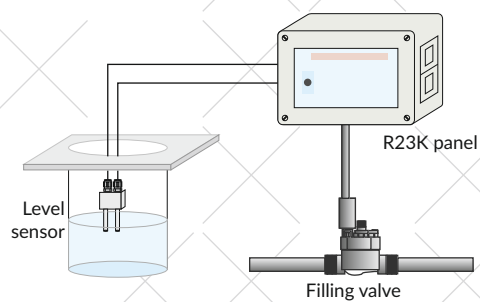

## Electrovalves 24V



Electrovalve **voltage 24VAC**. Body glass material. Straight through flow. Andirect Acting. Recommended for filling from the mains water.



*Industrial*  
**d'Automatismes**

E.Ribas Industrial d'Automatismes, S.L. - Castelló, 68 - 17485 Vila-sacra (Girona)  
Telf. 972.510.015 - ribas@e-ribas.com - www.e-ribas.com